

VDS-108/M10H | 182mm TOPCon Half Cell Series

410-430W

108-CELL HALF CUT MONOCRYSTALLINE SOLAR MODULE

Artikel-Nr.: 430-03.2023-R35-C350

22.0%

Module Efficiency

430W

Highest Power Output

12 YEARS

Material & Workmanship Warranty

25 YEARS

Linear Power Warranty

-2.00% First year power degradation

-0.55% Annual degradation

PRODUCT ADVANTAGES



10BB half-cut cell technology

New circuit design, lower internal current, lower Rs loss Ga doped wafer, attenuation <2% (1st year) / ≤0.55% (Linear)



Significantly lower the risk of hot spot

Special circuit design with much lower hot spot temperature



Lower LCOE

2% more power generation, lower LCOE



Excellent Anti-PID performance


2 times of industry standard Anti-PID test by TUV SUD



IP68 junction box

High waterproof level

PERFORMANCE WARRANTY

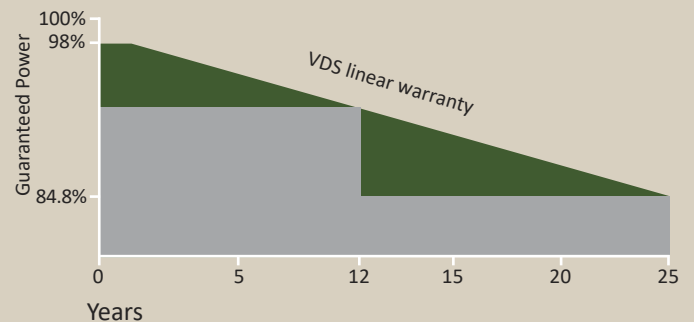

Certifications of Product and Manufacturer



VDS POWER GMBH

Rudolf-Diesel-Strasse 10, 33178 Borchten

www.vdspower.de

ELECTRICAL PARAMETERS

Maximum Power (Pmax/W)*	410	415	420	425	430
Operating Voltage (Vmp/V)	31.7	31.9	32.1	32.3	32.5
Operating Current (Imp/A)	12.94	13.01	13.09	13.16	13.24
Open-Circuit Voltage (Voc/V)	38.3	38.5	38.7	38.9	39.1
Short-Circuit Current (Isc/A)	13.63	13.72	13.81	13.91	14.01
Module Efficiency ηm (%)	21.0	21.2	21.5	21.7	22.0
Power Tolerance (W)	0~+5				

STC: Irradiance 1000W/m², module temperature 25°C, AM=1.5; *Measuring tolerance: ±3%

PERFORMANCE AT NMOT

Maximum Power (Pmax/W)	313	317	321	325	329
Operating Voltage (Vmp/V)	29.8	30.0	30.2	30.4	30.6
Operating Current (Imp/A)	10.51	10.57	10.63	10.70	10.76
Open-Circuit Voltage (Voc/V)	36.2	36.4	36.6	36.8	37.0
Short-Circuit Current (Isc/A)	11.02	11.1	11.18	11.25	11.33

NMOT: Irradiance 800W/m², ambient temperature 20°C, AM=1.5, wind speed 1m/s

MECHANICAL SPECIFICATION

Cell Type	Monocrystalline
Cell Dimensions	182*182 mm
Cell Arrangement	108 (6*18)
Weight	21 kg
Module Dimensions	1724*1134*30 mm
Cable Length	350 mm or customized length
Cable Cross Section Size	TÜV: 4 mm ²
Front Glass	3.2 mm AR Coating Tempered Glass
No. of Bypass Diodes	3/6
Packing Configuration	36 pcs/Carton, 936 pcs/40HQ
Frame	Anodized Aluminium Alloy
Junction Box	IP68



OPERATING CONDITIONS

Maximum System Voltage	1500V/DC(IEC)
Operating Temperature	-40°C to +85°C
Maximum Series Fuse	25A
Static Loading	Snow Loading: 5400Pa / Wind Loading: 2400Pa
Conductivity at Ground	≤0.1Ω
Safety Class	II
Resistance	≥100MΩ
Connector	MC4 compatible



TEMPERATURE COEFFICIENT

Temperature Coefficient Pmax	-0.30%/°C
Temperature Coefficient Voc	-0.25%/°C
Temperature Coefficient Isc	+0.046%/°C
NMOT	42±2°C

TECHNICAL DRAWINGS

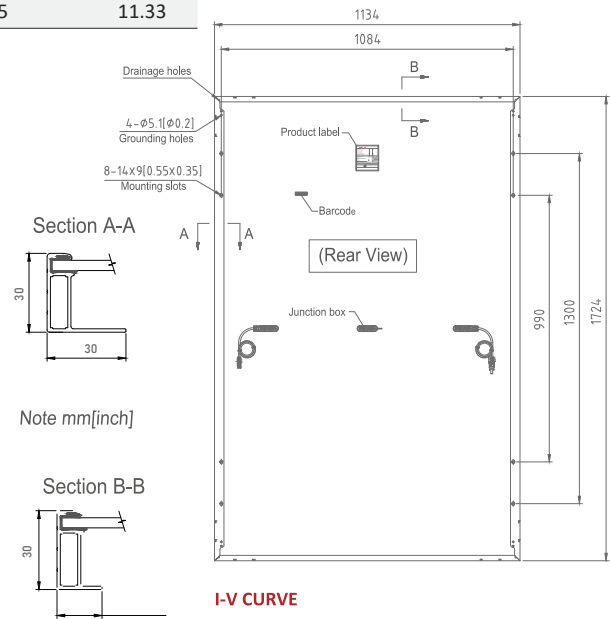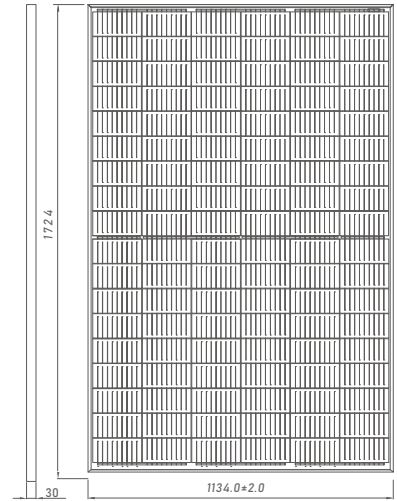

I-V CURVE

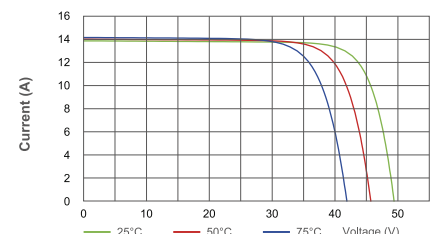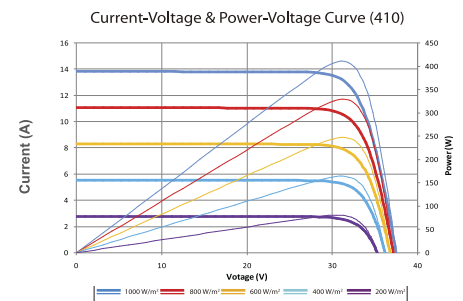

COMPANY PROFILE

VDS-Power is a German-based company with strong expertise in providing Photovoltaic solution globally. Our management team has been focused in European market for more than 10 years. We have satisfied customers in Germany, Spain, Italy, Bulgarian and many other European countries. Through direct access to production, we control the quality of photovoltaic modules by monitoring and documents the manufacturing processes from material procurement to final testing. With a warehouse in Rotterdam we ensures fast delivery within EU. This enables us to quickly meet the needs of different purchase quantities. We attach great importance to a reliable partnership and cooperation with our customers. We value reliability, commitment, security and transparency.